
WAREHOUSE TROLLEY

810X720 H1700 & H1900




Example configuration of optional equipment for the container

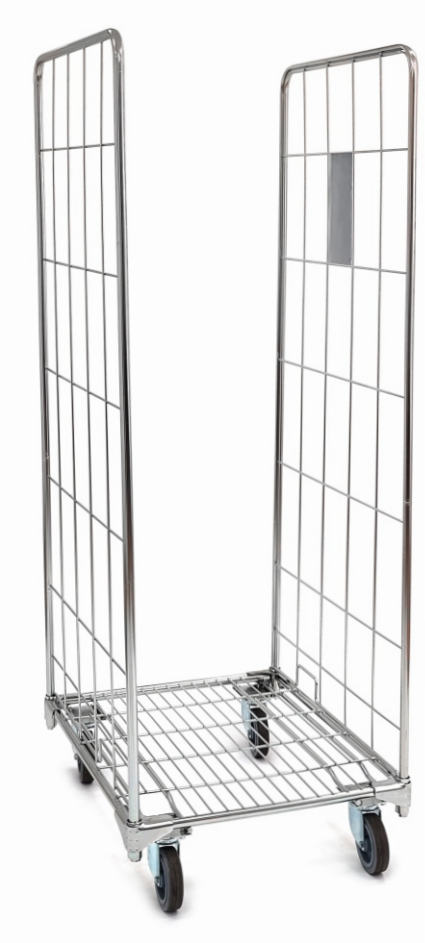

Extensive container configuration options thanks to easy, tool-free assembly and a wide range of optional equipment.

DIMENSIONS:

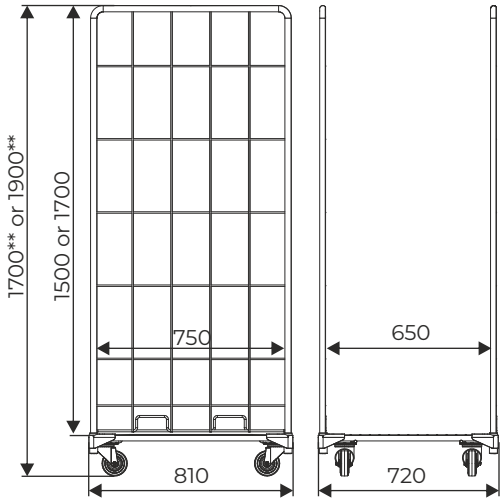

PARAMETERS:

Technical data:
The standard container consists of a base with wheels and two side panels placed on top of it. Optionally, closing panels, shelves, and a belt can be added in any configuration.
Standard wheel: polyamide 100 mm
Standard finish: zinc plated + lacquer
Total loading of the container: 500 kg
Toading of the standard wire shelf: 70 kg
Toading of the reinforced wire shelf: 100 kg

STANDARD EQUIPMENT:

1. chassis on wheels - 1 pc
2. side wall H1500/H1700 - 1 pc
3. side wall H1500/H1700 with identification board - 1 pc

OPTIONAL EQUIPMENT:

4. closed wall H1500/H1700
5. standard wire shelf
6. reinforced wire shelf
7. textile or rubber belt



Wheel types for container assembly:

Wheel type	4 swivel wheels	*4 swivel wheels, 2 wheels with the brakes	2 swivels wheels, 2 fixed wheels	* 2 swivel wheels with brake, 2 fixed wheels
polypropylene Ø 100 mm	✓		✓	
polyamide Ø 100 mm	✓	✓		✓
polyamide Ø 125 mm	✓		✓	
rubber Ø 125 mm	✓	✓	✓	✓
sandwic Ø 125 mm			✓	✓

PRODUCT NAME		INDEX
Warehouse trolley 810x720 H1700	galvanized zinc + lacquer	919-351-470
Warehouse trolley 810x720 H1900	galvanized zinc + lacquer	919-351-518

*photos/pictures are examples of product configuration
** for wheels with a brake, the container height 1730 oder 1930 mm

All rights reserved
20.01.2026

TROLLEYS
WAREHAUSE

DAMIX Sp z o.o.
ul. Bohaterów Czerwca 1956 r. 3, 87-500 Rypin, Poland
tel. +48 54 280 34 93
E-mail: damix@damix.pl, handel@damix.pl
www.damix.pl