PANEL TRANSPORTER

CARRY WP4BW




The trolley is designed for transporting plasterboard, furniture boards, plywood, doors, etc. with a height not exceeding 2100 mm.

PARAMETERS:

BASKET CAPACITY	50 kg
BASKET LOADING	50 kg
TOTAL LOADING	200 kg
WHEEL DIAMETER	160 mm
NESTING DISTANCE	280 mm

Standard coating: galvanized zinc + lacquer
Optional coating: galvanized zinc + powder coating

DIMENSIONS:

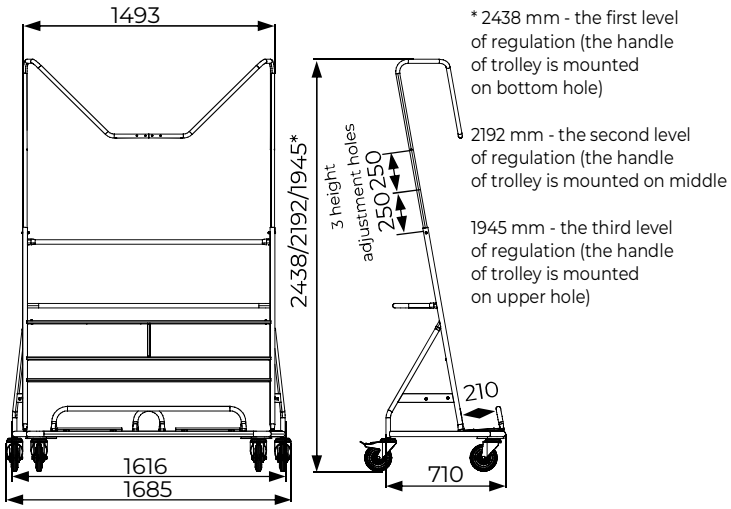


* 2438 mm - the first level of regulation (the handle of trolley is mounted on bottom hole)

2192 mm - the second level of regulation (the handle of trolley is mounted on middle


1945 mm - the third level of regulation (the handle of trolley is mounted on upper hole)

INSTRUCTION:


Way of inserting plate:

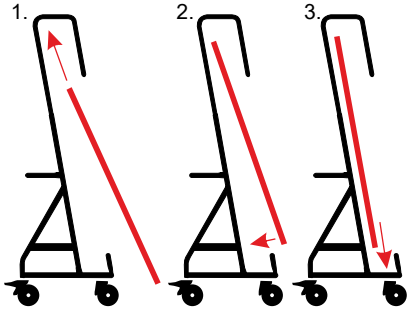

The maximum width of plate:




Maximum and minimum height of plate for a particular level of regulation:

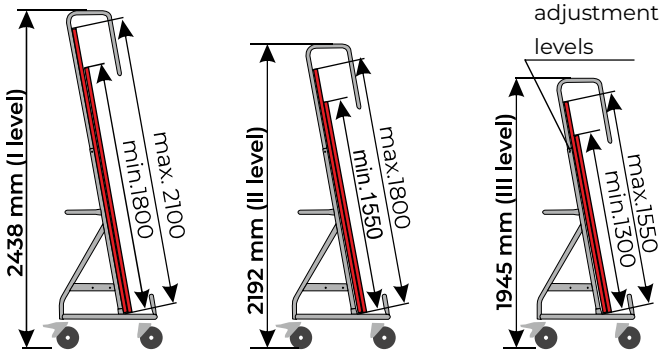

THE LENGHT OF ONE TROLLEY'S ROW:

710mm + (x * 280 mm)



5 trolleys	2110 mm
10 trolleys	3510 mm
20 trolleys	6310 mm

ADDITIONAL EQUIPMENT:



PRODUCT NAME		INDEX
Panel transporter Carry WP4BW	galvanized zinc + lacquer	919-344-077

*photos/pictures are examples of product configuration

All rights reserved
20.01.2026

TRANSPORT
TROLLEYS

DAMIX Sp z o.o.
ul. Bohaterów Czerwca 1956 r. 3, 87-500 Rypin, Poland
e-mail: damix@damix.pl, handel@damix.pl
www.damix.pl